



Fire Pump

MP482FP


Standard Features

- Powder-coated Frame
- Auto-return decompression for efficient starting at all temperature conditions

Options

- Cam Lock Fittings
- 10" pneumatic wheel kit
- 16" pneumatic wheel kit

Performance of High Pressure Pumps

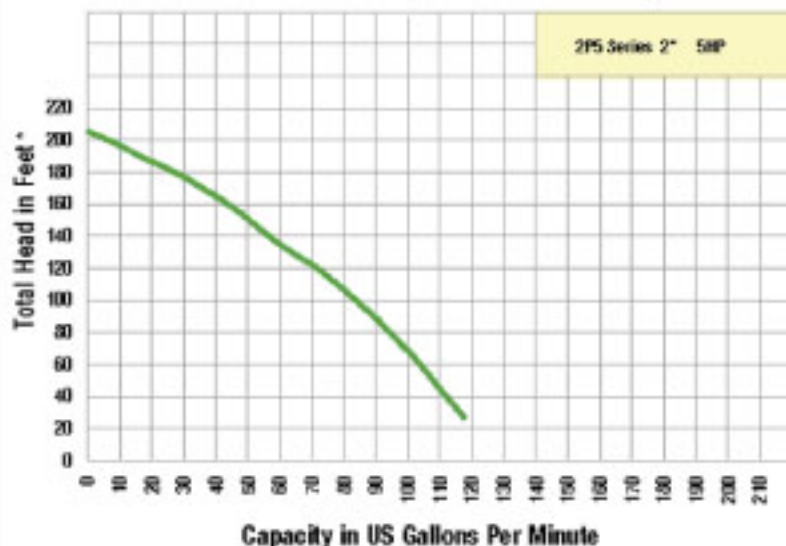

*Convert to PSI, divide by 2.31

Liquid-Water specific gravity 1.0

Specifications	
Pump	IPT 2PS
Construction	Die Cast Aluminum
Total Head	(up to) 209'
Priming Lift	18'
Output	90 gpm
Size	2"x2" (suction & discharge)
Pressure	75 psi
Engine	
Yanmar Model	L48V6CF1T1AA
Max Output	4.7 hp @ 3600 rpm
Operation Capacity	Approximately 3-4 hours
Package	
Weight	110 lbs
L x W x H	24" x 19" x 24"

YANMAR

Solutioneering Together