



# Cast Iron Centrifugal Pumps



**MP482CI/MP482CIE  
MP703CI/MP703CIE**

## Standard Features

- Powder-coated Frame
- Up to 25% sand & debris particles
- Solid handling capacity up to 1/4 diameter

## Options

- Cam Lock Fittings
- Low oil shutdown on electric start only
- 10" pneumatic wheel kit
- 16" pneumatic wheel kit

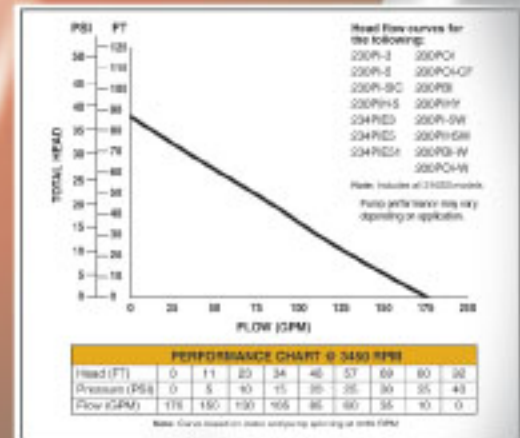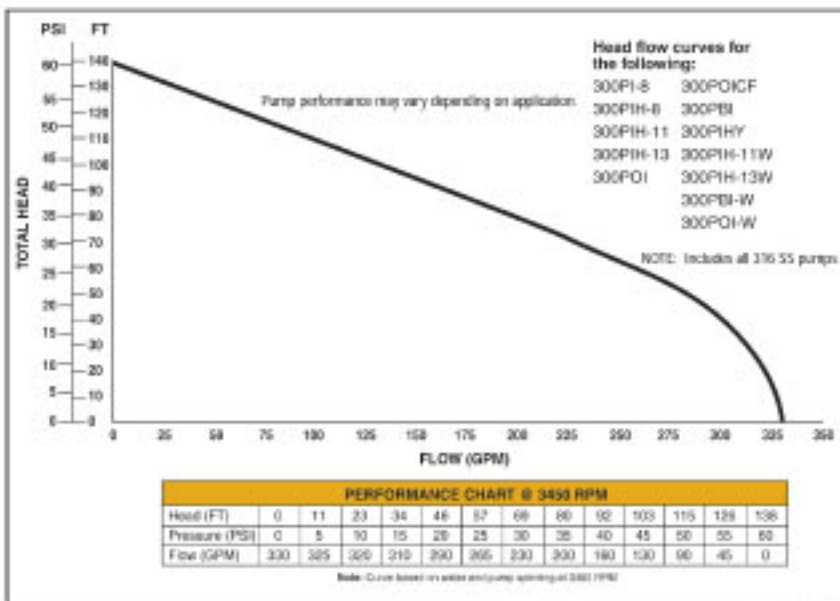

Specifications		
Pump	Banjo	
Construction	Cast iron housings, Cast iron impeller	
Seals	Self-lubricating mech. seals	
Seal Faces	Carbon-ceramic	
Output	170 gpm 80 ft total head	330 gpm 80 ft total head
Size	2" x 2" (suction & discharge)	3" x 3" (suction discharge)
Lift	Up to 25'	
Engine		
Model	L48V6CF1T1AA / L48V6CA1T1AA	L70V6CF1T1AA / L70V6CA1T1AA
Max Output	4.7 hp @ 3600 rpm	6.4 hp @ 3600 rpm
Operation Capacity	Approximately 3-4 hours	
Package		
Weight	153 lbs • 169 lbs electric	224 lbs • 240 lbs electric
L x W x H	24" x 19" x 24"	27" x 21" x 24"

**YANMAR**  
Solutioneering Together